


## ENDLESS ROUND SLINGS ACC. TO EN 1492-2



- Safety factor 7 : 1
- Colour code acc. to EN 1492 - 2
- One black stripe per ton W.L.L.

colour	min NL m	max NL m	W.L.L.				
			kg	kg	kg	45° kg	60° kg
violet	0.5	20	1000	800	2000	1400	1000
green	0.5	20	2000	1600	4000	2800	2000
yellow	0.5	50	3000	2400	6000	4200	3000
grey	0.5	50	4000	3200	8000	5600	4000
red	0.5	50	5000	4000	10000	7000	5000
brown	1.0	50	6000	4800	12000	8400	6000
blue	1.5	50	8000	6400	16000	11200	8000
orange	2.5	50	10000	8000	20000	14000	10000
orange	2.5	50	20000	16000	40000	28000	20000
orange	2.5	50	30000	24000	60000	42000	30000
orange	2.5	50	40000	32000	80000	56000	40000
orange	2.5	50	50000	40000	100000	70000	50000
orange	2.5	50	60000	48000	120000	84000	60000
orange	2.5	50	80000	64000	160000	112000	80000
orange	2.5	50	100000	80000	200000	140000	100000
orange	2.5	50	200000	160000	400000	224000	200000
orange	2.5	50	300000	240000	600000	336000	300000
orange	2.5	50	400000	320000	800000	448000	400000
orange	2.5	50	500000	400000	1000000	560000	500000



## ENDLESS ROUND SLINGS WITH SLEEVE ACC. TO EN 1492-2

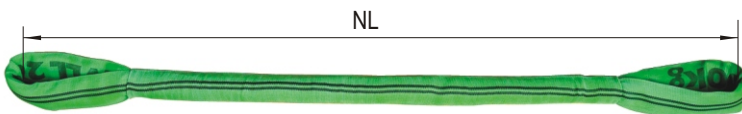

- Safety factor 7 : 1
- Colour code acc. to EN 1492 - 2
- One black stripe per ton W.L.L.



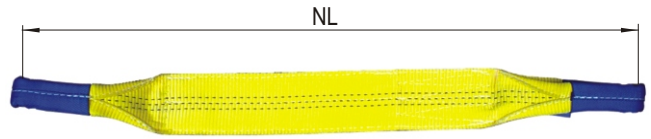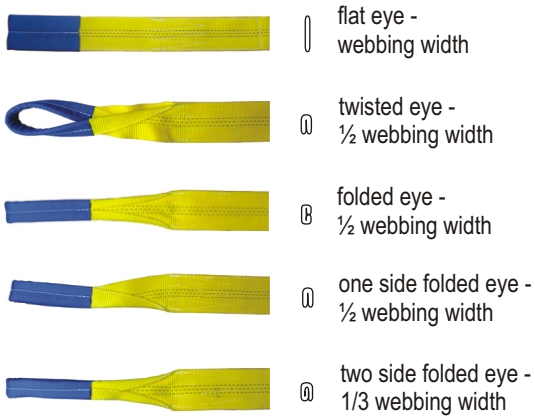


colour	min NL m	max NL m	W mm	EL mm	W.L.L.				
					kg	kg	kg	45° kg	60° kg
violet	0.5	10	35	150	1000	800	2000	1400	1000
green	0.5	10	40	200	2000	1600	4000	2800	2000
yellow	0.5	20	50	200	3000	2400	6000	4200	3000
grey	0.5	20	60	300	4000	3200	8000	5600	4000
red	0.5	20	70	300	5000	4000	10000	7000	5000
brown	1.0	50	75	400	6000	4800	12000	8400	6000
blue	1.5	50	86	400	8000	6400	16000	11200	8000
orange	2.5	50	100	500	10000	8000	20000	14000	10000
orange	2.5	50	130	600	20000	16000	40000	28000	20000

# FLAT POLYESTER WEBBING SLINGS ACC. TO EN1492-1




FLAT WEBBING SLING






- Safety factor 7 : 1
- Colour code acc. to EN 1492 - 1
- One black stripe per ton W.L.L.

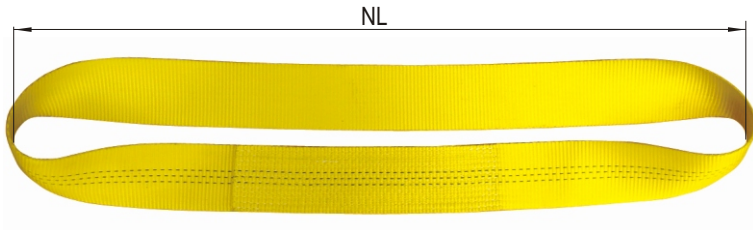Colour	Width mm	Ply	min NL m	max. NL m	W.L.L.					Eye length mm
					 kg	 kg	 kg	 45° kg	 60° kg	
violet	30	1	1.0	20	500	400	1000	700	500	90
violet	30	2	1.0	20	1000	800	2000	1400	1000	90
violet	30	3	1.0	20	1500	1200	3000	2100	1500	120
violet	30	4	1.0	20	2000	1600	4000	2800	2000	120
green	60	1	1.0	20	1000	800	2000	1400	1000	180
green	60	2	1.0	20	2000	1600	4000	2800	2000	180
green	60	3	1.0	20	3000	2400	6000	4200	3000	230
green	60	4	1.0	20	4000	3200	8000	5600	4000	230
yellow	90	1	1.0	50	1500	1200	3000	2100	1500	270
yellow	90	2	1.0	50	3000	2400	6000	4200	3000	270
yellow	90	3	1.0	50	4500	3600	9000	6300	4500	320
yellow	90	4	1.0	50	6000	4800	11200	8400	6000	320
grey	120	1	2.0	50	2000	1600	4000	2800	2000	360
grey	120	2	2.0	50	4000	3200	8000	5600	4000	360
grey	120	3	2.0	50	6000	4800	12000	8400	6000	420
grey	120	4	2.0	50	8000	6400	16000	11200	8000	420
red	150	1	2.0	50	2500	2000	5000	3500	2500	450
red	150	2	2.0	50	5000	4000	10000	7000	5000	450
red	150	3	2.0	50	7500	6000	15000	10500	7500	500
red	150	4	2.0	50	10000	8000	20000	14000	10000	500
brown	180	1	2.0	50	3000	2400	6000	4200	3000	450
brown	180	2	2.0	50	6000	4800	12000	8400	6000	450
brown	180	3	2.0	50	9000	7200	18000	12600	9000	520
brown	180	4	2.0	50	12000	9600	24000	16800	12000	520
blue	240	1	3.0	50	4000	3200	8000	5600	4000	600
blue	240	2	3.0	50	8000	6400	16000	11200	8000	600
blue	240	3	3.0	50	12000	9600	24000	16800	12000	700
blue	240	4	3.0	50	16000	12800	32000	22400	16000	700
orange	300	1	3.0	50	5000	4000	10000	7000	5000	750
orange	300	2	3.0	50	10000	8000	20000	14000	10000	750
orange	300	3	3.0	50	15000	12000	30000	21000	15000	850
orange	300	4	3.0	50	20000	16000	40000	28000	20000	850


# ENDLESS FLAT POLYESTER WEBBING SLINGS ACC.TO EN 1492-1






- Safety factor 7 : 1
- Colour code acc. to EN 1492 - 1
- One black stripe per ton W.L.L.

Colour	Width mm	Ply	Min NL m	Max NL m	W.L.L.				
					 kg	 kg	 kg	 kg	 kg
violet	30	1	0.5	20	1000	800	2000	1400	1000
violet	30	2	0.5	20	2000	1600	4000	2800	2000
violet	30	3	0.5	20	3000	2400	6000	4200	3000
violet	30	4	0.5	20	4000	3200	8000	5600	4000
green	60	1	1.0	20	2000	1600	4000	2800	2000
green	60	2	1.0	20	4000	3200	8000	5600	4000
green	60	3	1.0	20	6000	4800	12000	8400	6000
green	60	4	1.0	20	8000	6400	16000	11200	8000
yellow	90	1	1.0	20	3000	2400	6000	4200	3000
yellow	90	2	1.0	20	6000	4800	12000	8400	6000
yellow	90	3	1.0	20	9000	7200	18000	12600	9000
yellow	90	4	1.0	20	12000	9600	24000	16800	12000
grey	120	1	2.0	50	4000	3200	8000	5600	4000
grey	120	2	2.0	50	8000	6400	16000	11200	8000
grey	120	3	2.0	50	12000	9600	24000	16800	12000
grey	120	4	2.0	50	16000	12800	32000	22400	16000
red	150	1	2.0	50	5000	4000	10000	7000	5000
red	150	2	2.0	50	10000	8000	20000	14000	10000
red	150	3	2.0	50	15000	12000	30000	21000	15000
red	150	4	2.0	50	20000	16000	40000	28000	20000
brown	180	1	2.0	50	6000	4800	12000	8400	6000
brown	180	2	2.0	50	12000	9600	24000	16800	12000
brown	180	3	2.0	50	18000	14400	36000	25200	18000
brown	180	4	2.0	50	24000	19200	48000	33600	24000
blue	240	1	3.0	50	8000	6400	16000	11200	8000
blue	240	2	3.0	50	16000	12800	32000	22400	16000
blue	240	3	3.0	50	24000	19200	48000	33600	24000
blue	240	4	3.0	50	32000	25600	64000	44800	32000
orange	300	1	3.0	50	10000	8000	20000	14000	10000
orange	300	2	3.0	50	20000	16000	40000	28000	20000
orange	300	3	3.0	50	30000	24000	60000	42000	30000
orange	300	4	3.0	50	40000	32000	80000	56000	40000
orange	300	5	3.0	50	50000	40000	100000	70000	50000
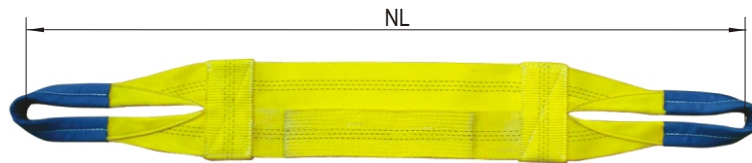
## WIDE WEBBING SLINGS



Colour	Width mm	Ply	min NL m	max NL m	W.L.L.		
					 kg	 kg	 kg
violet	60	1	0.5	20	2000	1400	1000
violet	60	2	0.5	20	4000	2800	2000
violet	60	3	0.5	20	6000	4200	3000
violet	60	4	0.5	20	8000	5600	4000
green	120	1	1.0	20	4000	2800	2000
green	120	2	1.0	20	8000	5600	4000
green	120	3	1.0	20	12000	8400	6000
green	120	4	1.0	20	16000	11200	8000
yellow	180	1	1.0	20	6000	4200	3000
yellow	180	2	1.0	20	12000	8400	6000
yellow	180	3	1.0	20	18000	12600	9000
yellow	180	4	1.0	20	24000	16800	12000
grey	240	1	2.0	50	8000	5600	4000
grey	240	2	2.0	50	16000	11200	8000
grey	240	3	2.0	50	24000	16800	12000
grey	240	4	2.0	50	32000	22400	16000
red	300	1	2.0	50	10000	7000	5000
red	300	2	2.0	50	20000	14000	10000
red	300	3	2.0	50	30000	21000	15000
red	300	4	2.0	50	40000	28000	20000
brown	360	1	2.0	50	12000	8400	6000
brown	360	2	2.0	50	24000	16800	12000
brown	360	3	2.0	50	36000	25200	18000
brown	360	4	2.0	50	48000	33600	24000
blue	480	1	3.0	50	16000	11200	8000
blue	480	2	3.0	50	32000	22400	16000
blue	480	3	3.0	50	48000	33600	24000
blue	480	4	3.0	50	64000	44800	32000
orange	600	1	3.0	50	20000	14000	10000
orange	600	2	3.0	50	40000	28000	20000
orange	600	3	3.0	50	60000	42000	30000
orange	600	4	3.0	50	80000	56000	40000
orange	600	5	3.0	50	100000	70000	50000



## RATCHET TIE - DOWNS




WITH HOOKS




ENDLESS

Colour	Webbing width mm	W.L.L.		Minimum length m	Maximum length m
		 DaN	 DaN		
green	35	1000	2000	1	20
blue	48	2000	4000	1	20
yellow	50	2500	5000	1	20
orange	75	5000	1000	1	20



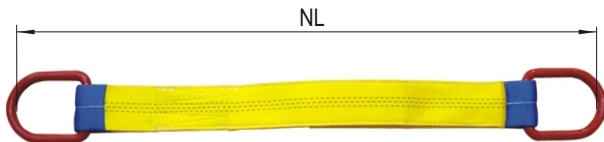


## FLAT WEBBING SLINGS WITH METAL FITTINGS

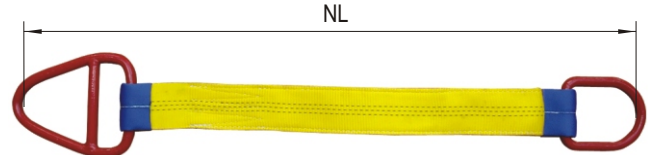

FLAT WEBBING SLING WITH RINGS




FLAT WEBBING SLING WITH CHOKER AND RING


Colour	Width mm	Ply	W.L.L.				
			 kg	 kg	 kg	 kg	 kg
green	60	1	1000	800	2000	1400	1000
green	60	2	2000	1600	4000	2800	2000
yellow	90	1	1500	1200	3000	2100	3000
yellow	90	2	3000	2400	6000	4200	3000
grey	120	1	2000	1600	4000	2800	2000
grey	120	2	4000	3200	8000	5600	4000
red	150	1	2500	2000	5000	3500	2500
red	150	2	5000	4000	10000	7000	5000
brown	180	1	3000	2400	6000	4200	3000
brown	180	2	6000	4800	12000	8400	4000
blue	240	1	4000	3200	8000	5600	6000
blue	240	2	8000	6400	16000	11200	8000
orange	300	1	5000	4000	10000	7000	5000
orange	300	2	10000	8000	20000	14000	10000

## PU WEBBING SLINGS PROTECTION

ONE - SIDED

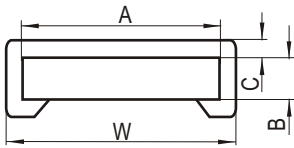


TWO - SIDED

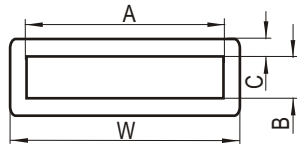

SLEEVE PROTECTION

Index	Width	Ply	A	W	B	C
50/40/10/5	30	2	40	50	10	5
50/40/20/5	30	4	40	50	20	5
70/60/12/5	50	2	60	70	12	5
70/60/17/5	50	4	60	70	17	5
80/70/12/5	60	2	70	80	12	5
80/70/24/5	60	4	70	80	24	5
110/100/12/5	90	2	100	110	12	5
110/100/24/5	90	4	100	110	24	5
145/135/12/5	120	2	135	145	12	5
145/135/24/5	120	4	135	145	24	5
170/160/12/5	150	2	160	170	12	5
170/160/24/5	150	4	160	179	24	5
200/190/12/5	180	2	190	200	12	5
200/190/24/5	180	4	190	200	24	5
260/250/15/8	240	2	250	260	15	8
290/280/30/8	240	4	280	290	30	8
330/320/15/8	300	2	320	330	15	8
330/320/30/8	300	4	320	330	30	8

## PU WEBBING SLINGS PROTECTION

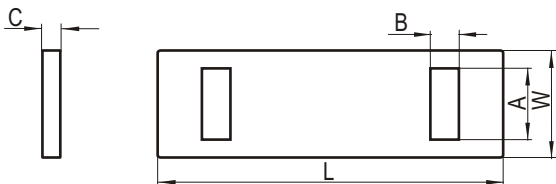

SHEET PROTECTION

Webbing width mm	L mm	W mm	A mm	B mm	C mm
30	250	80	35	10	5
50	450	100	60	30	5
60	450	120	70	30	5
90	470	150	100	40	5
120	470	170	130	40	5
150	470	200	160	40	5
180	470	240	190	40	5
240	470	300	250	40	5
300	470	360	310	40	5